


TRASERSCREEN DB-60

Vibrating screener



ENGINEERING
TRASERSCREEN

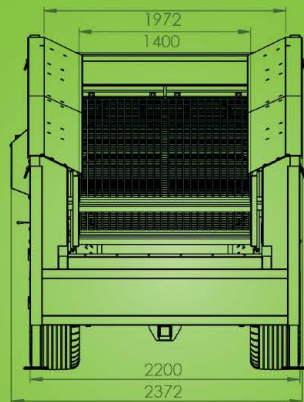

Powerful mobile
Vibrating screener



info@traserscreen.be



www.traserscreen.be



+32 (0)497 13 14 15



België



Fine fraction conveyor



Wheel chocks



Electro-hydraulic aggregate




Screen box
meshes made of high-quality spring steel

Lifting point
4 lifting points at an ideal angle

Frame
high-strength steel construction
ensures maximum stability

Retractable coupler

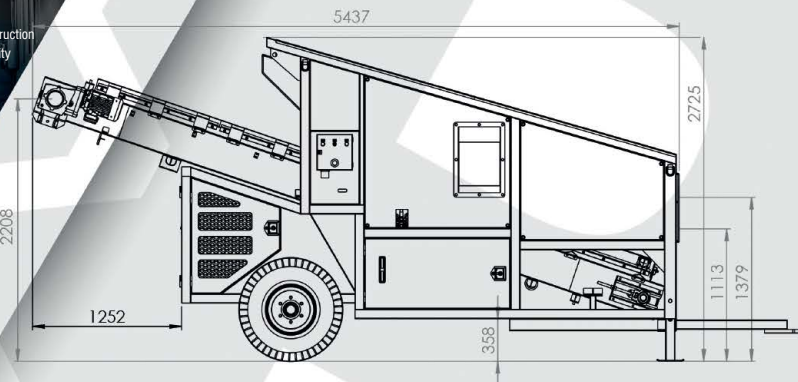

Screening

- » Width x length: 1400 x 2835mm
- » Screening area: 3,97m²
- » Number of decks: 2
- » Number of fractions: 2
- » Number of meshes: 2 (1390 x 2850mm)
- » Hopper width: 1972mm
- » Offtake width: -



Optional upgrades

- » Minimum requirement for the generator (22kVA)



Power

- » 5,5kW screener
- » 3kW conveyor



Weight

- » 3400kg



Transport method

- » Trailer



Screening

- » depending on the material